

Address: 21414 NE Sandy Blvd #B3

Fairview, OR 97024

Fax:

Phone: 503-667-9358

Hours: 9 - 5 Monday—Friday

Web: IronEagleTinyHouseTrailers.com

503-674-8538

"You won't find a better trailer for less!"

10 - 2 Saturday


PADs e r i e s

Trailer chassis designed exclusively for tiny houses.



Pictured above is a PAD-14k24 equipped with optional Galvanized Bottom Pan, Fender Flashing, and Leveling Jacks

Our PAD series trailers are specifically designed as a foundation for a tiny house. Every detail of the frame is tailored for supporting a tiny house structure and its contents. For example, the crossmember supports are recessed 6" below the top of the frame to accommodate floor insulation without sacrificing floor height. This feature also minimizes contact of steel framework to the subfloor for a significant gain in thermal efficiency. Our PAD series isn't simply a modified flatbed trailer; it's designed from the ground up for one purpose only . . . to be the ultimate foundation for your tiny house.

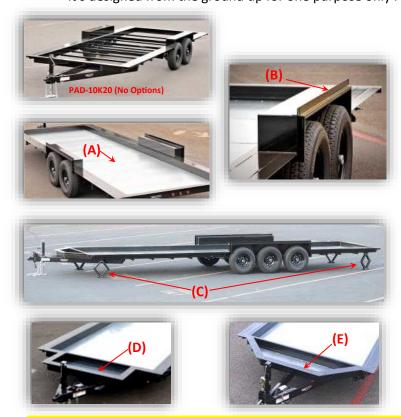

MODEL	LENGTH	AXLES**	GVWR	WEIGHT*	PRICE
PAD-5k10	10 Ft	(1) 5k	5,000	920	\$3440
PAD-7k12	12 Ft	(1) 7k	7,000	1075	\$3760
PAD-10k14	14 Ft	(2) 5k	10,000	1,485	\$4880
PAD-10k16	16 Ft	(2) 5k	10,000	1,550	\$5140
PAD-10k18	18 Ft	(2) 5k	10,000	1,620	\$5290
PAD-10k20	20 Ft	(2) 5k	10,000	1,685	\$5480
PAD-14k22	22 Ft	(2) 7k	14,000	1,835	\$5990
PAD-14k24	24 Ft	(2) 7k	14,000	1,890	\$6280
PAD-14k26	26 Ft	(2) 7k	14,000	1,965	\$6590
PAD-20k28	28 Ft	(3) 7k	21,000	2,595	\$8490
PAD-20k30	30 Ft	(3) 7k	21,000	2,680	\$8990

AVAILABLE OPTIONS	WEIGHT	PRICE		
(A) Galvanized Bottom Pan	10 Lbs/Lineal Ft	\$24/Lineal Ft		
(B) Fender Flashing (Pair)	15 Lbs	\$110		
(C) Leveling Jacks (Set of 4)	60 Lbs	\$290		
(D) Rectangle Front Bumpout	115 Lbs	\$360		
(E) Tapered Front Bumpout	95 Lbs	\$490		

^{*} Completed trailer weight in pounds.


^{**} All axles are equipped with electric brakes.




21414 NE Sandy Blvd Fairview, OR 97024 503-667-9358

Frame Length

	10'*	12'*	14'	16'	18'	20'	22'	24'	26'	28'**	30'**
A	120"	144"	168"	192"	216"	240"	264"	288"	312"	336"	360"
B	110"	134"	158"	182"	206"	230"	254"	278"	302"	326"	350"
C	55"	69"	69"	84"	98"	113"	125"	142"	157"	148"	164"
D	32"	42"	36"	45"	55"	64"	72"	79"	88"	89"	97"
E	33"	33"	63"	63"	63"	63"	67"	67"	67"	99"	99"

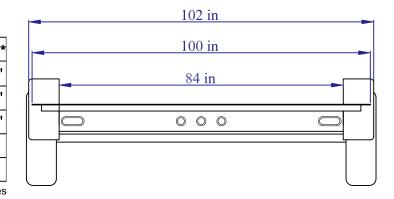

^{**} Equipped with triple 7000 Lb axles

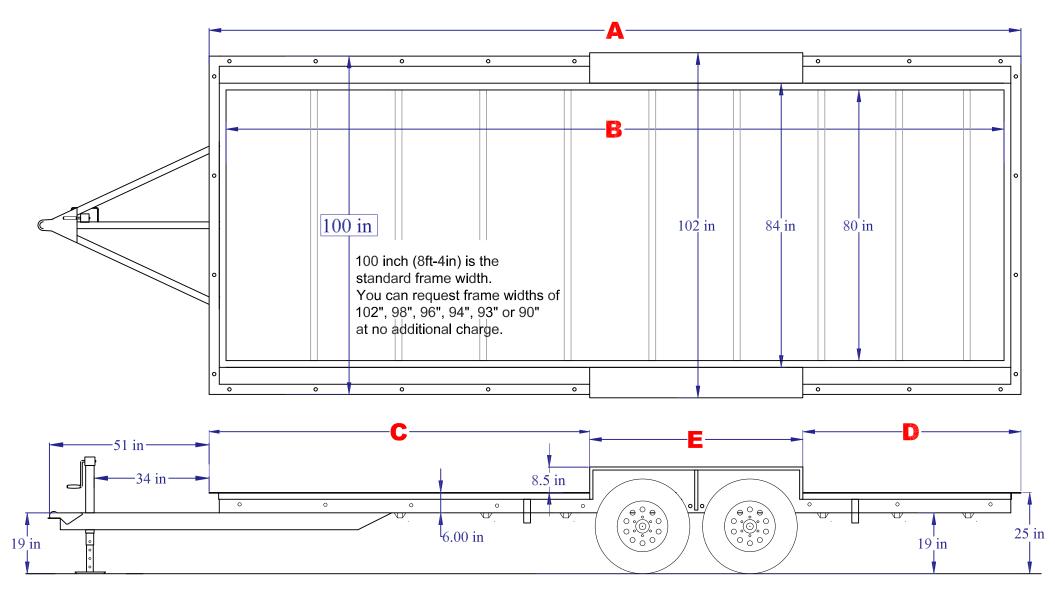

^{*} Equipped with a single 5200 Lb axle